




产品目录册 —
PRODUCTS
BROCHURE




HENAN BINGO PIPELINE CO., LTD.
Mobile: +86 15515596408(WhatsApp)
Email: miki@bingopipes.com
Website: www.bingopipes.com
Tel: +86 371 8618 0298
Add: R606, F6, BUILDING 18, NO. 150 JIANSHE
WEST ROAD, ZHONGYUAN DISTRICT, ZHENGZHOU,
CHINA

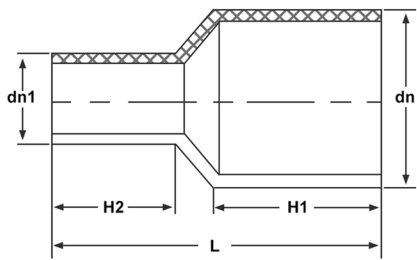

异径直接 Reducer


规格 dn-dn1	尺寸 Size (mm)			壁厚 Thickness		
SPECIFICATION dn-dn1	L	H1	H2	SDR17	SDR13.6	SDR11
S63×25	155	63	55	√		√
S63×32	155	63	55	√		√
S63×40	155	53	55	√		√
S63×50	158	63	55	√		√
S75×32	160	70	60	√		√
S75×40	160	70	60	√		√
S75×50	160	80	60	√		√
S75×63	160	80	63	√		√
S90×40	175	79	60	√		√
S90×50	175	79	60	√		√
S90×63	175	79	65	√		√
S90×75	175	79	70	√		√
S110×40	185	89	60	√		√
S110×50	185	89	60	√		√
S110×63	185	89	63	√		√
S110×75	185	89	70	√		√
S110×90	185	89	79	√		√
S125×50	195	87	60	√		√
S125×63	195	87	63	√		√
S125×75	195	87	70	√		√
S125×90	195	87	80	√		√
S125×110	195	87	82	√		√
S140×63	180	80	67	√		√
S140×75	180	80	75	√		√
S140×90	180	80	83	√		√
S140×110	180	80	83	√		√
S140×125	180	80	85	√		√
S160×63	215	98	63	√		√
S160×75	215	98	70	√		√
S160×90	215	98	80	√		√
S160×110	215	98	82	√		√
S160×125	215	98	87	√		√
S160×140	215	98	90	√		√
S180×63	200	80	63	√		√
S180×75	200	80	70	√		√
S180×90	200	80	79	√		√
S180×110	200	80	100	√		√
S180×125	200	80	100	√		√
S180×140	200	80	100	√		√
S180×160	200	80	80	√		√
S200×63	230	112	63	√		√
S200×75	230	112	70	√		√
S200×90	230	112	79	√		√
S200×110	230	112	82	√		√
S200×125	230	112	87	√		√
S200×140	230	112	92	√		√
S200×160	230	112	98	√		√
S200×180	230	112	105	√		√
S225×90	218	85	80	√		√
S225×110	218	85	80	√		√
S225×125	218	85	80	√		√
S225×160	218	85	80	√		√
S225×180	218	85	80	√		√
S225×200	218	85	80	√		√
S250×90	230	90	100	√		√
S250×110	260	90	100	√		√
S250×125	230	90	89	√		√

规格 dn-dn1	尺寸 Size (mm)			壁厚 Thickness		
SPECIFICATION dn-dn1	L	H1	H2	SDR17	SDR13.6	SDR11
S250×160	230	90	93	√		√
S250×180	230	90	95	√		√
S250×200	230	90	97	√		√
S250×225	230	90	100	√		√
S280×110	255	105	95	√		√
S280×125	245	105	100	√		√
S280×140	245	105	100	√		√
S280×160	245	105	105	√		√
S280×180	245	105	105	√		√
S280×200	245	105	120	√		√
S280×225	245	105	120	√		√
S280×250	245	105	130	√		√
S315×110	235	90	87	√		√
S315×160	235	90	87	√		√
S315×180	240	90	90	√		√
S315×200	240	90	90	√		√
S315×225	240	90	105	√		√
S315×250	240	90	100	√		√
S315×280	240	90	110	√		√
S355×110	270	105	110	√		√
S355×160	275	105	110	√		√
S355×200	260	105	110	√		√
S355×225	255	105	110	√		√
S355×250	240	105	110	√		√
S355×280	235	105	110	√		√
S355×315	230	105	110	√		√
S400×110	270	100	110	√		√
S400×160	270	100	110	√		√
S400×200	270	100	110	√		√
S400×225	265	100	110	√		√
S400×250	250	100	110	√		√
S400×315	230	100	110	√		√
S400×355	230	100	110	√		√
S450×110	270	105	110	√		√
S450×160	270	105	110	√		√
S450×200	270	105	110	√		√
S450×225	270	105	110	√		√
S450×250	270	105	110	√		√
S450×280	255	105	110	√		√
S450×315	250	105	110	√		√
S450×355	245	105	110	√		√
S450×400	245	105	110	√		√
S500×160	280	100	110	√		√
S500×200	280	100	110	√		√
S500×250	280	100	110	√		√
S500×315	275	100	110	√		√
S500×355	275	100	110	√		√
S500×400	275	100	110	√		√
S500×450	275	100	110	√		√
S560×315	280	105	110	√		√
S560×355	265	105	110	√		√
S560×400	260	105	120	√		√
S560×450	250	105	120	√		√
S560×500	240	105	120	√		√
S630×250	285	110	100	√		√
S630×315	285	110	100	√		√
S630×355	285	110	110	√		√
S630×400	285	110	120	√		√
S630×450	275	110	120	√		√
S630×500	260	110	120	√		√
S630×560	250	110	130	√		√
S710×250	370	120	110	√		√
S710×315	370	120	110	√		√
S710×355	370	120	110	√		√
S710×400	370	120	110	√		√
S710×500	350	120	110	√		√
S710×560	350	120	110	√		√
S710×630	280	120	110	√		√
S800×250	420	120	100	√		√
S800×315	420	120	100	√		√
S800×355	420	120	100	√		√

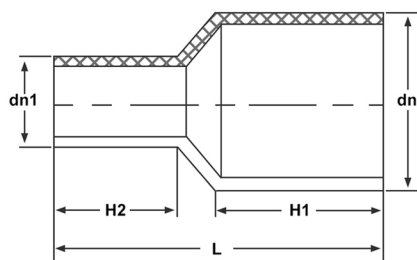


异径直接 Reducer

规格 dn-dn1	尺寸 Size (mm)			壁厚 Thickness		
SPECIFICATION dn-dn1	L	H1	H2	SDR17	SDR13.6	SDR11
S800×400	420	120	100	√		
S800×450	400	120	110	√		
S800×500	390	120	110	√		
S800×560	340	120	120	√		
S800×630	330	120	120	√		
S800×710	300	120	125	√		
S900×800	310	120	125	√		
S1000×800	340	120	130	√		
S1000×900	310	125	137	√		
S1200×800	460	145	140	√		
S1200×1000	410	145	175	√		

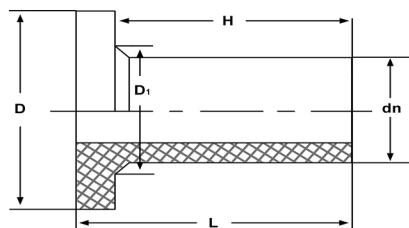


长颈法兰 Stub End Long Neck

规格 dn	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn	L	H	D1	D	SDR17	SDR13.6	SDR11
FL63	115	102	75	102	√		√
FL75	115	100	89	120	√		√
FL90	135	118	104	135	√		√
FL110	140	122	124	155	√		√
FL125	175	155	132	158	√		√
FL140	175	153	154	188	√		√
FL160	175	149	174	212	√		√
FL180	175	145	188	212	√		√
FL200	175	142	235	268	√		√
FL225	175	145	232	268	√		√
FL250	175	143	285	320	√		√
FL280	175	130	290	320	√		√
FL315	205	170	335	370	√		√

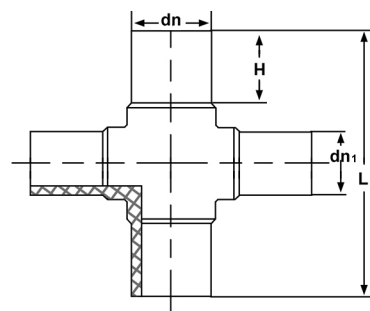


注塑异径四通 Reducing Cross Tee

规格 dn-dn1	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn-dn1	dn	dn1	L	H	SDR17	SDR13.6	SDR11
+90X63	90	63	240	75	√		√
+110X63	110	63	279	68	√		√
+110X75	110	75	279	75	√		√
+110X90	110	90	279	82	√		√
+160X63	160	63	329	67	√		√
+160X75	160	75	329	74	√		√
+160X90	160	90	329	82	√		√
+160X110	160	110	329	85	√		√
+200X110	200	110	379	85	√		√
+200X160	200	160	379	85	√		√
+225X110	225	110	415	86	√		√
+225X160	225	160	415	86	√		√
+225X200	225	200	415	91	√		√
+250X110	250	110	461	96	√		√
+250X160	250	160	461	96	√		√
+250X200	250	200	461	98	√		√
+315X110	315	110	543	91	√		√
+315X160	315	160	543	91	√		√
+315X200	315	200	543	96	√		√
+315X250	315	250	543	110	√		√
+355X200	355	200	485	120	√		
+400X110	400	110	351	120	√		
+400X200	400	200	439	120	√		
+450X200	450	200	490	120	√		
+450X315	450	315	605	130	√		
+500X110	500	110	356	125	√		
+500X160	500	160	406	125	√		
+500X200	500	200	445	135	√		
+500X250	500	250	495	135	√		
+500X315	500	315	560	136	√		
+500X400	500	400	644	136	√		
+560X200	560	200	515	140	√		
+560X315	560	315	625	140	√		
+630X200	630	200	530	140	√		
+630X315	630	315	660	140	√		
+710X200	710	200	568	167	√		
+710X315	710	315	681	167	√		
+710X400	710	400	794	168	√		
+710X500	710	500	864	168	√		
+710X630	710	630	993	168	√		
+800X200	800	200	606	206	√		
+800X315	800	315	719	319	√		
+800X400	800	400	802	402	√		
+800X500	800	500	902	502	√		
+800X630	800	630	1031	631	√		

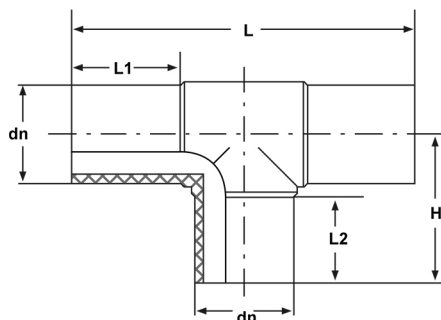

等径三通 Equal Tee

规格 dn	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn	L	L1	L2	H	SDR17	SDR13.6	SDR11
T50	170	55	55	88	√		√
T63	203	63	63	104	√		√
T75	230	70	70	118	√		√
T90	263	79	79	134	√		√
T110	295	82	82	145	√		√
T125	315	87	87	163	√		√
T140	345	92	92	175	√		√
T160	365	98	98	188	√		√
T180	410	105	105	210	√		√
T200	436	112	112	225	√		√
T225	495	120	120	245	√		√
T250	535	129	129	270	√		√
T280	585	139	139	300	√		√
T315	640	150	150	323	√		√
T355	640	130	130	330	√		√
T400	675	125	125	350	√		√
T450	770	145	145	410	√		√
T500	800	135	170	440	√		√
T560	910	140	170	475	√		√
T630	970	150	160	485	√		√
T710	1075	180	180	545	√		√
T800	1205	185	185	610	√		√

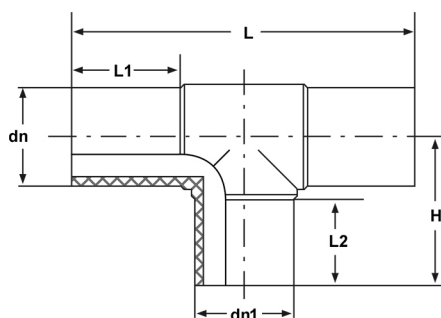


异径三通 Reducing Tee

规格 dn-dn1	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn-dn1	L	L1	L2	H	SDR17	SDR13.6	SDR11
T63X25	174	63	45	90	√		√
T63X32	174	63	45	92	√		√
T63X40	190	63	55	100	√		√
T63X50	190	63	56	100	√		√
T75X32	200	70	45	95	√		√
T75X40	220	70	50	103	√		√
T75X50	220	70	55	110	√		√
T75X63	220	70	63	116	√		√
T90X40	240	79	50	110	√		√

异径三通 Reducing Tee

规格 dn-dn1	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn-dn1	L	L1	L2	H	SDR17	SDR13.6	SDR11
T90X50	240	79	55	110	√		√
T90X63	240	79	63	115	√		√
T90X75	263	79	70	125	√		√
T110X32	243	82	48	115	√		√
T110X40	243	82	49	125	√		√
T110X50	243	82	55	130	√		√
T110X63	243	82	63	135	√		√
T110X75	270	82	70	140	√		√
T110X90	270	82	79	150	√		√
T125X50	265	87	60	140	√		√
T125X63	265	87	63	145	√		√
T125X75	265	87	70	155	√		√
T125X90	280	87	79	160	√		√
T125X110	315	87	82	165	√		√
T140X63	278	92	63	143	√		√
T140X75	278	92	70	155	√		√
T140X90	312	92	79	160	√		√
T140X110	312	92	82	160	√		√
T140X125	345	92	87	172	√		√
T160X50	275	98	55	150	√		√
T160X63	275	98	63	158	√		√
T160X75	302	98	70	168	√		√
T160X90	302	98	79	175	√		√
T160X110	323	98	82	180	√		√
T160X125	365	98	87	190	√		√
T160X140	345	98	92	195	√		√
T180X90	340	105	79	185	√		√
T180X110	340	105	82	190	√		√
T180X125	390	105	87	195	√		√
T180X140	390	105	92	200	√		√
T180X160	390	105	98	203	√		√
T200X63	315	112	63	180	√		√
T200X75	315	112	70	183	√		√
T200X90	350	112	79	192	√		√
T200X110	350	112	82	198	√		√
T200X125	400	112	87	202	√		√
T200X140	400	112	92	207	√		√
T200X160	400	112	98	210	√		√
T200X180	436	112	105	118	√		√
T225X63	355	120	63	190	√		√
T225X75	355	120	70	197	√		√
T225X90	355	120	79	212	√		√
T225X110	375	120	82	215	√		√
T225X125	425	120	87	214	√		√
T225X140	425	120	92	218	√		√
T225X160	425	120	98	228	√		√
T225X180	465	120	105	232	√		√
T225X200	465	120	112	238	√		√
T250X90	395	129	79	225	√		√
T250X110	395	129	82	225	√		√
T250X125	445	129	87	230	√		√
T250X140	445	129	92	235	√		√
T250X160	445	129	98	240	√		√
T250X180	485	129	105	245	√		√
T250X200	485	129	112	252	√		√
T250X225	535	129	120	260	√		√
T280X110	415	139	82	240	√		√
T280X125	465	139	87	245	√		√
T280X140	465	139	92	250	√		√
T280X160	465	139	98	260	√		√
T280X180	505	139	105	265	√		√
T280X200	505	139	112	270	√		√
T280X225	555	139	120	275	√		√
T280X250	555	139	129	285	√		√
T315X90	440	150	79	260	√		√
T315X110	440	150	82	262	√		√
T315X125	485	150	87	262	√		√

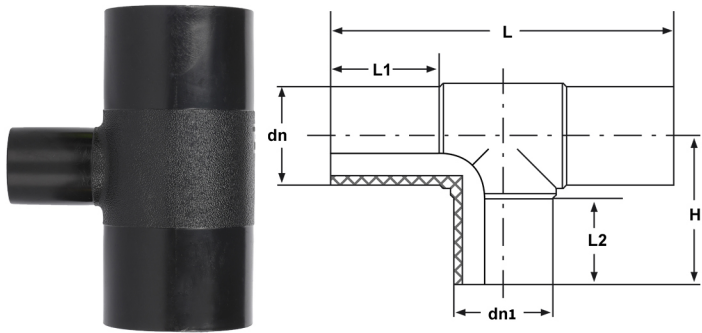

异径三通 Reducing Tee

规格 dn-dn1	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn-dn1	L	L1	L2	H	SDR17	SDR13.6	SDR11
T315X140	485	150	92	265	√		√
T315X160	485	150	98	272	√		√
T315X180	530	150	105	280	√		√
T315X200	530	150	112	285	√		√
T315X225	575	150	120	295	√		√
T315X250	575	150	129	302	√		√
T315X280	640	150	139	312	√		√
T355X90	468	164	79	275	√		√
T355X110	468	164	82	276	√		√
T355X125	485	164	87	285	√		√
T355X140	485	164	92	286	√		√
T355X160	485	164	98	295	√		√
T355X180	555	164	105	300	√		√
T355X200	555	164	112	308	√		√
T355X225	610	164	120	315	√		√
T355X250	610	164	129	324	√		√
T355X280	640	164	139	335	√		√
T355X315	640	130	150	345	√		√
T400X90	495	179	79	300	√		√
T400X110	495	179	82	305	√		√
T400X125	545	179	87	308	√		√
T400X140	545	179	92	310	√		√
T400X160	545	179	98	315	√		√
T400X180	585	179	105	325	√		√
T400X200	585	179	112	335	√		√
T400X225	640	179	120	345	√		√
T400X250	640	179	129	350	√		√
T400X280	675	179	139	360	√		√
T400X315	675	165	150	370	√		√
T400X355	675	145	150	375	√		√
T450X90	435	155	80	360	√		√
T450X110	435	155	82	350	√		√
T450X160	485	155	115	380	√		√
T450X200	530	155	110	370	√		√
T450X225	550	155	110	410	√		√
T450X250	580	155	110	375	√		√
T450X280	600	140	140	385	√		√
T450X315	600	130	140	385	√		√
T450X355	660	140	160	405	√		√
T450X400	720	145	145	405	√		√
T500X110	430	150	80	350	√		√
T500X125	485	150	110	350	√		√
T500X160	485	150	110	350	√		√
T500X200	520	145	110	400	√		√
T500X225	550	150	110	410	√		√
T500X250	560	155	110	410	√		√
T500X280	630	155	145	430	√		√
T500X315	640	145	110	400	√		√
T500X355	610	120	145	470	√		√
T500X400	728	150	150	460	√		√
T500X450	710	115	150	450	√		√
T560X110	410	135	140	445	√		√
T560X160	450	135	140	445	√		√


异径三通 Reducing Tee

规格 dn-dn1	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn-dn1	L	L1	L2	H	SDR17	SDR13.6	SDR11
T560X200	508	135	140	445	√		√
T560X225	545	150	140	445	√		√
T560X250	545	135	140	445	√		√
T560X280	600	150	145	450	√		√
T560X315	605	135	145	450	√		√
T560X355	710	150	160	465	√		√
T560X400	720	135	160	465	√		√
T560X450	825	150	170	475	√		√
T560X500	825	140	170	475	√		√
T630X110	475	145	135	480	√		√
T630X160	475	140	140	485	√		√
T630X200	550	150	145	490	√		√
T630X225	555	150	145	490	√		√
T630X250	555	140	145	490	√		√
T630X280	660	160	145	490	√		√
T630X315	665	150	145	490	√		√
T630X355	720	150	160	505	√		√
T630X400	725	145	160	505	√		√
T630X450	800	150	180	525	√		√
T630X500	810	145	180	525	√		√
T710X110	500	180	160	520	√		√
T710X160	545	180	160	520	√		√
T710X200	568	180	165	522	√		√
T710X250	630	180	165	522	√		√
T710X315	681	180	165	522	√		√
T710X400	764	180	165	522	√		√
T710X500	864	180	165	522	√		√
T710X630	983	180	165	525	√		√
T800X110	505	185	170	573	√		√
T800X160	550	185	170	573	√		√
T800X200	606	185	170	573	√		√
T800X250	630	185	170	573	√		√
T800X315	719	185	170	573	√		√
T800X400	802	185	170	573	√		√
T800X500	902	185	170	573	√		√
T800X630	1031	185	170	573	√		√
T800X710	1100	185	170	573	√		√

Y型三通 45° Branch Y Tee


规格 dn
SPECIFICATION dn
YT63X45°
YT75X45°
YT90X45°
YT110X45°
YT125X45°
YT140X45°
YT160X45°
YT180X45°
YT200X45°
YT225X45°
YT250X45°
YT280X45°
YT315X45°



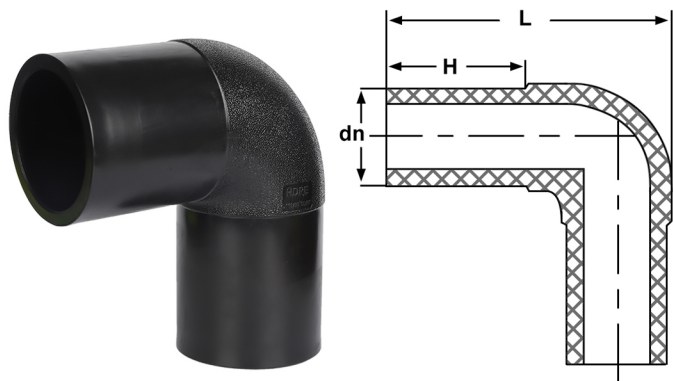

90°等径弯头 90° Elbow

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
L50X90°	115	55	√		√
L63X90°	132	63	√		√
L75X90°	160	70	√		√
L90X90°	180	79	√		√
L110X90°	220	82	√		√
L125X90°	225	87	√		√
L140X90°	240	92	√		√
L160X90°	270	98	√		√
L180X90°	298	105	√		√
L200X90°	325	112	√		√
L225X90°	365	120	√		√
L250X90°	394	129	√		√
L280X90°	435	139	√		√
L315X90°	480	150	√		√
L355X90°	540	164	√		√
L400X90°	600	179	√		√
L450X90°	605	150	√		√
L500X90°	660	150	√		√
L560X90°	720	155	√		√
L630X90°	790	155	√		√
L710X90°	915	180	√		
L800X90°	1005	180	√		

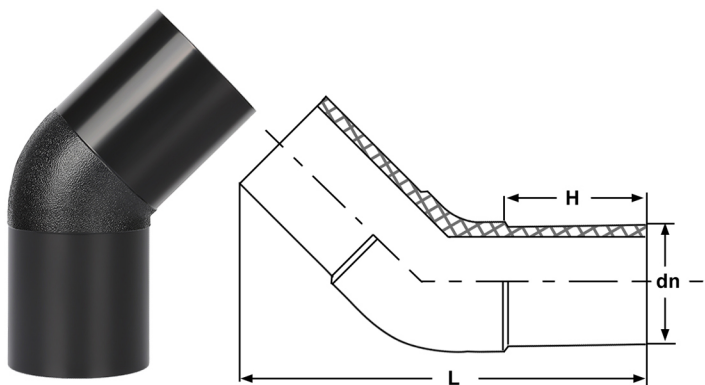


45°弯头 45° Elbow

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
L50X45°	150	55	√		√
L63X45°	160	63	√		√
L75X45°	185	70	√		√
L90X45°	228	79	√		√
L110X45°	265	82	√		√
L125X45°	250	87	√		√
L140X45°	270	92	√		√


45°弯头 45° Elbow

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
L160X45°	305	98	√		√
L180X45°	340	105	√		√
L200X45°	355	112	√		√
L225X45°	398	120	√		√
L250X45°	420	129	√		√
L280X45°	485	139	√		√
L315X45°	510	150	√		√
L355X45°	550	164	√		√
L400X45°	600	179	√		√
L450X45°	560	130	√		√
L500X45°	610	135	√		√
L560X45°	650	135	√		√
L630X45°	710	145	√		√
L710X45°	835	180	√		
L800X45°	900	180	√		

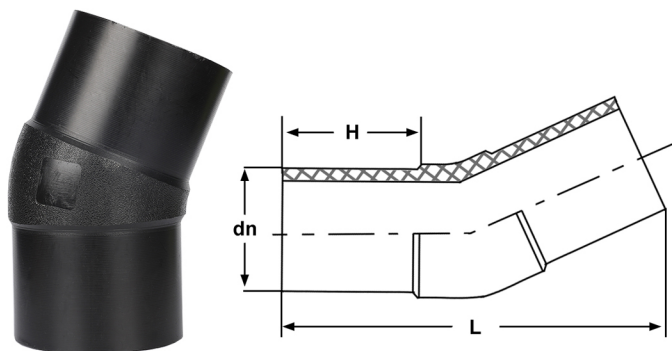


22.5°弯头 22.5° Elbow

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
L90X22.5°	192	71		√	√
L110X22.5°	194	72		√	√
L125X22.5°	208	80		√	√
L140X22.5°	220	80		√	√
L160X22.5°	240	82		√	√
L180X22.5°	280	105		√	√
L200X22.5°	260	85		√	√
L225X22.5°	270	90		√	√
L250X22.5°	315	100		√	√
L280X22.5°	320	105		√	√
L315X22.5°	355	110		√	√
L355X22.5°	395	105	√		√
L400X22.5°	400	110	√		√
L450X22.5°	440	115	√		√
L500X22.5°	450	115	√		√
L560X22.5°	520	135	√		√
L630X22.5°	540	130	√		√
L710X22.5°	690	170	√		√
L800X22.5°	720	170	√		√

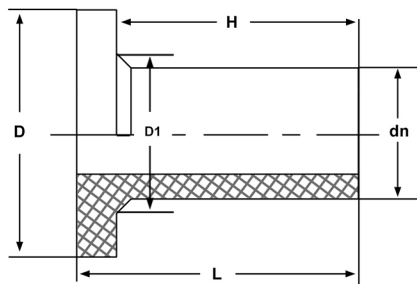

法兰 Stub End

规格 dn	尺寸 Size (mm)				壁厚 Thickness		
SPECIFICATION dn	L	H	D1	D	SDR17	SDR13.6	SDR11
FL50	88	76	56	80			√
FL63	90	77	75	102	√		√
FL75	98	84	89	120	√		√
FL90	110	93	104	135	√		√
FL110	120	102	124	155	√		√
FL125	127	107	132	158	√		√
FL140	127	105	154	188	√		√
FL160	135	109	174	212	√		√
FL180	135	105	188	212	√		√
FL200	155	122	235	268	√		√
FL225	145	115	232	268	√		√
FL250	160	128	285	320	√		√
FL280	160	125	290	320	√		√
FL315	175	140	335	370	√		√
FL355	175	140	373	430	√		√
FL400	180	145	427	482	√		√
FL450	208	165	475	585	√		√
FL500	215	168	530	585	√		√
FL560	220	174	582	625	√		√
FL630	230	178	642	685	√		√
FL710	235	178	737	800	√		√
FL800	240	183	840	905	√		√
FL900	245	187	930	1005	√		√
FL1000	250	192	1030	1110	√		√
FL1200	300	230	1230	1300	√		

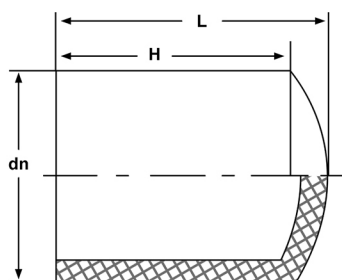


管帽 End Cup

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
D63	84	70	√		√
D75	87	74	√		√
D90	93	84	√		√
D110	98	84	√		√
D125	107	87	√		√
D140	120	92	√		√

管帽 End Cup

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
D160	128	102	√		√
D180	135	105	√		√
D200	142	112	√		√
D225	130	115	√		√
D250	140	128	√		√
D280	140	120	√		√
D315	160	150	√		√
D355	140	115	√		√
D400	130	100	√		√
D450	140	115	√		√
D500	140	115	√		√
D560	150	115	√		√
D630	150	115	√		√
D710	160	125	√		
D800	160	125	√		
D900	160	125	√		
D1000	160	125	√		
D1200	200	155	√		

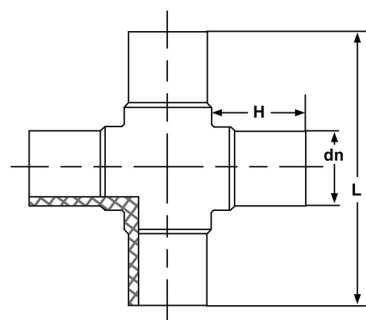

四通 Cross Tee

规格 dn	尺寸 Size (mm)		壁厚 Thickness		
SPECIFICATION dn	L	H	SDR17	SDR13.6	SDR11
+63	198	63			√
+75	225	70			√
+90	260	78		√	√
+110	285	80		√	√
+125	295	85		√	√
+160	352	88		√	√
+200	400	92		√	√
+225	415	92		√	√
+250	480	103		√	√
+315	555	103		√	√
+355	640	140	√		√
+400	650	112	√		√
+450	740	140	√		
+500	810	150	√		
+560	875	150	√		
+630	960	160	√		
+710	1072	180	√		
+800	1202	185	√		



Henan Bingo Pipeline Co., Ltd.

Tel: +86 371 8618 0298

Mobile: +86 15515596408(WhatsApp/Wechat/Viber)

Email: sales@bingopipes.com

Website: www.bingopipes.com

Add: R606, F6, Building 18, No. 150 Jianshe West Road, Zhongyuan

District, Zhengzhou, China